

# Asta® Drip Pressure Compensating



A PC spike dripper with turbulent flow path, sealed to maintain pre-set discharge rates and uniformity. A nursery and landscape spike dripper that delivers precise amounts of water direct to the plant root zone.

## Features

- Registered design.
- Three colour coded flow rates: 2 lph, 4 lph & 8 lph.
- Turbulent flow path and self-flushing action with insect baffle to minimise blockages.
- Inlet barb has built-in filter.
- Outlet suitable for attaching 4 mm micro tube.
- UV stabilised materials for long life.

## Applications

Nurseries, shade houses, tree lots and landscape applications.

Performance	DISCHARGE (lph)		
	2 lph	4 lph	8 lph
<b>PRESSURE (kPa)</b>			
50	2.0	3.6	5.8
100	2.3	4.3	7.8
150	2.3	4.4	8.0
200	2.3	4.6	8.2
250	2.3	4.7	8.3
300	2.3	4.7	8.2
350	2.2	4.6	8.0
<b>MINIMUM CROSS SECTION (mm)</b>	0.7 x 0.6	0.8 x 0.8	1.2 x 0.9

\* C<sub>v</sub> for all Asta Drip® emitters conforms to ISO 9261

Asta® Drip  
PC 2 lph  
Spike 4 mm




Asta® Drip  
PC 4 lph  
Spike 4 mm



Asta® Drip  
PC 8 lph  
Spike 4 mm

## Discharge Rate: Asta® Drip PC

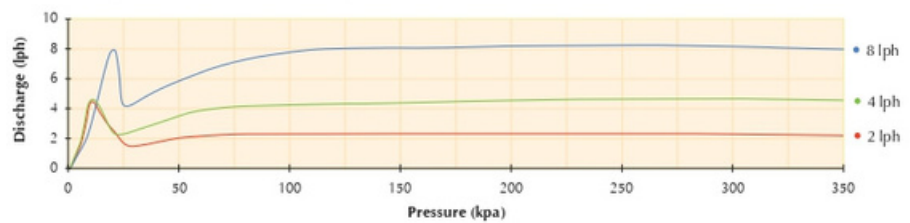

## Asta® Drip PC

NOMINAL FLOW	BASE COLOUR	ORDER CODE	PACK QUANTITY	PACKS PER CARTON	CARTON (kg)
2 lph	Red	30735	25	50	7.2
4 lph	Black	30745	25	50	7.2
8 lph	Green	30755	25	50	7.2

## Specifications

DIMENSIONS ASSEMBLED		UV STABILISED MATERIAL		BASE/CONNECTION TYPE	
HEIGHT	144 mm	SPIKE	polypropylene	Inlet: BARB	4 mm
WIDTH	33 mm	BASE	polypropylene	Outlet: SPOUT	4 mm
DEPTH	17 mm	DIAPHRAGM	silicone rubber		
WEIGHT (approx)	4.5 g				